



STRENGTHS

- > Bathroom/WC extractor
- > Intermittent extraction
- > Extremely quiet: from just 12 dB(A)
- > Clean lines
- > Wall, ceiling or window installation
- > Installation volume 1
- > Operation by switch (B), switch with timer (T) or humidity detection with timer (H)

Description	Ref. no.
Chico B	1302.0024
Chico T	1302.0026
Chico H	1302.0028

DESCRIPTION

- > Ø 100 mm
- > Good-looking ABS body and front panel
- > Ultra-low power consumption, ultra-quiet motor
- > 2 speeds adjustable during installation: 21 or 75 m³/h
- > 3 operating options:
 - B = the extractor is activated by a switch
 - T = the extractor is activated by a switch and has an adjustable timer between 5 and 30 minutes.
 - H = the extractor is activated by humidity detection (adjustable trigger threshold) and has a fixed 15-minute timer.
- > Non-return valve
- > White

BOX CONTENTS


Description	Quantity
Extractor	1
Non-return valve	1

ACCESSORIES

Description	Ref. no.	Details
Wall grille with shutter Ø 100 mm white	1304.0015	P. 64

DIMENSIONS


Weight: 700 g

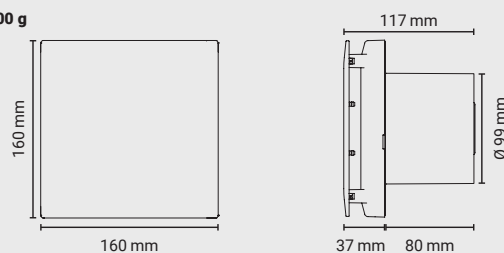

TECHNICAL DATA

- > Maximum flow rate: 75 m³/h
- > Maximum motor output: 4.8 W
- > Voltage: 220 - 240 V – 50 Hz
- > Extractor classification: IPX5
- > Maximum operating temperatures: -5°C / 40°C

PERFORMANCE

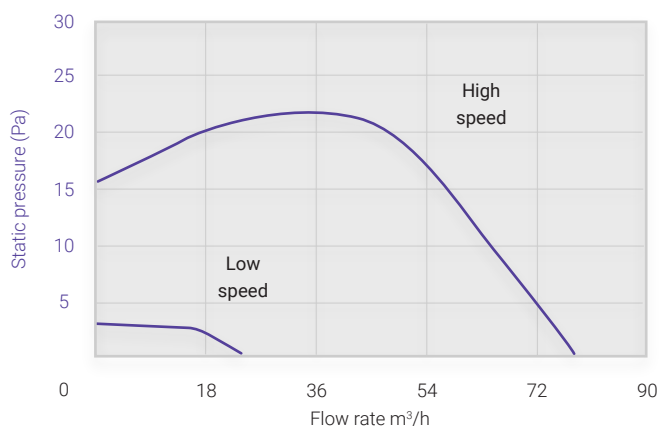

Speed	Flow rate (in m ³ /h)	Power (in W)
Low speed	21	2.7
High speed	75	4.8

dB(A) = 12, measured at 3m at low speed