



STRENGTHS

- > Bathroom/WC extractor
- > Intermittent extraction
- > Wall, ceiling or window installation
- > Volume 0 or 2 installation depending on model
- > Cord operation (Fuji B - V2), switch (Fuji B - V0), switch with timer (Fuji T - V2) or humidity detection (Fuji H - V0 and Fuji H - V2)

Description	Ref. no.
Fuji B - V2	1302.0015
Fuji T - V2	1302.0016
Fuji H - V2	1302.0017
Fuji B - V0	1302.0018
Fuji H - V0	1302.0019

DESCRIPTION

- > Ø 100 mm
- > ABS body
- > Very low consumption motor
- > 1 speed: 108 m³/h for V2 models or 82 m³/h for V0 models
- > 4 operating options:
 - B = the extractor is activated by a cord (Fuji B - V2) or a switch (Fuji B - V0)
 - T = the extractor is activated by a switch and has an adjustable timer between 3 and 25 minutes
 - H = the extractor starts up when humidity is detected, with a trigger threshold adjustable between 40% and 95% RH. These models also have a manual release via a cord
- > Operating indicator light
- > White

BOX CONTENTS


Description	Quantity
Extractor	1
Cord (for H models and B model - V2)	1
Transformer (for V0 models)	1

ACCESSORIES

Description	Ref. no.	Details
Wall grille with shutter Ø 100 mm white	1304.0015	P. 64

DIMENSIONS

Weight: 550 g

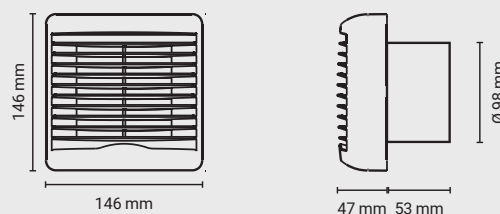

TECHNICAL DATA

- > Maximum flow rate: 82 m³/h (V0 models) or 108 m³/h (V2 models)
- > Maximum motor output: 13 W (Fuji B - V2 model) or 15 W (Fuji T - V2 model) or 16 W (Fuji B - V0 and Fuji H - V2 models) or 18 W (Fuji H - V0 model)
- > Voltage: 220 - 240 V – 50 Hz
- > Extractor classification: IPX4 (V2 models) and IPX7 (V0 models)
- > Maximum operating temperatures: -5°C / 40°C (V2 models) and 0°C / 40°C (V0 models)

PERFORMANCE

Model	Flow rate (in m ³ /h)	Power (in W)	dB(A) ⁽¹⁾
Fuji B - V2	108	13	
Fuji T - V2	108	15	
Fuji H - V2	108	16	36
Fuji B - V0	82	16	
Fuji H - V0	82	18	

⁽¹⁾ measured at 3m