



## STRENGTHS

- > Bathroom/WC extractor
- > Intermittent extraction
- > Ultra-slim profile
- > Wall, ceiling or window installation
- > Volume 0 or 2 installation depending on model
- > Operation by switch (B - V0/V2), switch with timer (T - V0/V2), humidity detection (H - V0), humidity detection with timer (H - V2) or presence detection with timer (PIRT - V2)

Description	Ref. no.
Haku B - V2	1302.0007
Haku T - V2	1302.0009
Haku H - V2	1302.0011
Haku PIRT - V2	1302.0013
Haku B - V0	1302.0001
Haku T - V0	1302.0003
Haku H - V0	1302.0005

## DESCRIPTION

- > Ø 100 mm
- > ABS body
- > Very low consumption motor
- > 1 speed: 75 m<sup>3</sup>/h
- > 5 operating options:
  - B = the extractor is activated by a switch
  - T = the extractor is activated by a switch and has an adjustable timer between 5 and 25 minutes
  - H = the extractor is activated by humidity detection with an adjustable trigger threshold (60-95% RH for the Haku H - V0 model and 65-95% RH for the Haku H - V2 model). The Haku H - V2 model also has a fixed 15-minute timer, while the Haku H - V0 model also has a manual release switch
  - PIRT = the extractor switches on automatically when it detects movement and has a timer that can be set between 5 and 25 minutes
- > Operating indicator light
- > Non-return valve
- > White

## BOX CONTENTS


Description	Quantity
Extractor	1
Non-return valve	1
Transformer (V0 models only)	1

## ACCESSORIES

Description	Ref. no.	Details
Wall grille with shutter Ø 100 mm white	1304.0015	P. 64

## DIMENSIONS

Weight: 600 g

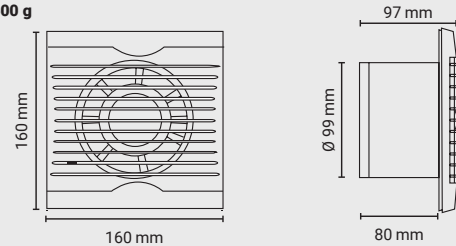

## TECHNICAL DATA

- > Maximum flow rate: 75 m<sup>3</sup>/h
- > Maximum motor output: 15 W (V0 models) or 16 W (V2 models)
- > Voltage: 220 - 240 V – 50 Hz
- > Extractor classification: IPX4 (V2 models) and IPX7 (V0 models)
- > Maximum operating temperatures: -5°C / 40°C (V2 models) and 0°C / 40°C (V0 models)

## PERFORMANCE

Model	Flow rate (in m <sup>3</sup> /h)	Power (in W)	dB(A) <sup>(1)</sup>
Haku B/T/H/PIRT - V2	75	16	30
Haku B/T/H - V0	75	15	30

<sup>(1)</sup>measured at 3m