



STRENGTHS

- > Bathroom/WC extractor
- > Continuous or intermittent extraction
- > Silent: from only 19 dB(A)
- > Elegant design
- > Wall or ceiling installation
- > Installation volume 2
- > Timer operation, humidity detection and odour detection

Description	Ref. no.
K2	1302.0034

DESCRIPTION

- > Ø 100 mm and Ø 125 mm (interchangeable flanges)
- > ABS body
- > Magnetic front panel
- > Quiet, low-energy motor, removable for easy maintenance
- > Speeds adjustable between:
 - 36 to 115 m³/h (in Ø 100 mm)
 - 54 to 140 m³/h (in Ø 125 mm)
- > The extractor operates either continuously, with a boost mode, or intermittently.
- > It has various operating options:
 - 15 or 30 minute timer
 - Humidity detection with 3 possible trigger thresholds
 - Unwanted odour detection
- > In intermittent mode, it also has an aeration function: if the extractor has been inactive for 26 hours, it automatically starts an extraction programme for 60 minutes to renew the air in the bathroom.
- > Parameter setting via LED touch panel
- > White


BOX CONTENTS

Description	Quantity
Extractor	1
Magnetic front panel	1
Ø 100 mm collar	1
Ø 125 mm collar	1

ACCESSORIES

Description	Ref. no.	Details
Wall mounting plate - white	1304.0040	P. 64
Check valve Ø 100 mm	1304.0041	P. 64
Check valve Ø 125 mm	1304.0042	P. 64


DIMENSIONS

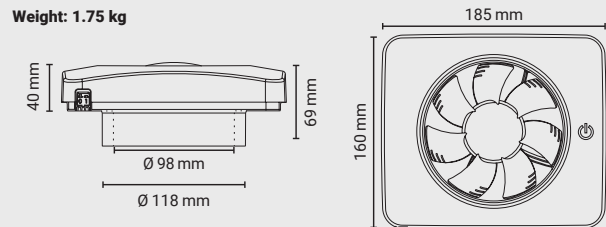

TECHNICAL DATA

- > Maximum flow rate: 140 m³/h
- > Maximum motor output: 5 W
- > Voltage: 100-240V AC 50-60 Hz
- > Extractor classification: IP44
- > Maximum operating temperatures: 0°C / 50°C

PERFORMANCE

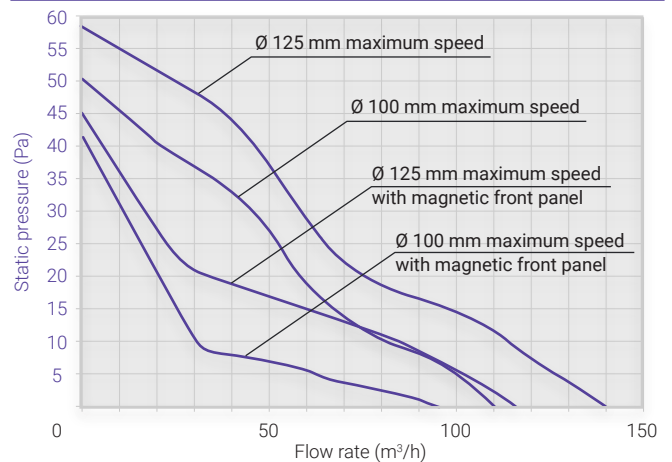

Diameter in mm	Speed	Flow rate in m ³ /h	Power input in W	dB(A) ⁽¹⁾
Ø 100	Continuous	36	2	19
Ø 100	Maximum	115	5	44
Ø 125	Continuous	54	2	23
Ø 125	Maximum	140	5	49

⁽¹⁾ measured at 3m